


B

B


A

A

DATE	REV	ECN	APP'D. BY
5/29/19	A0	RELEASED	—
10/15/20	A1	11639	JE
05/12/25	A2	12557	KAW

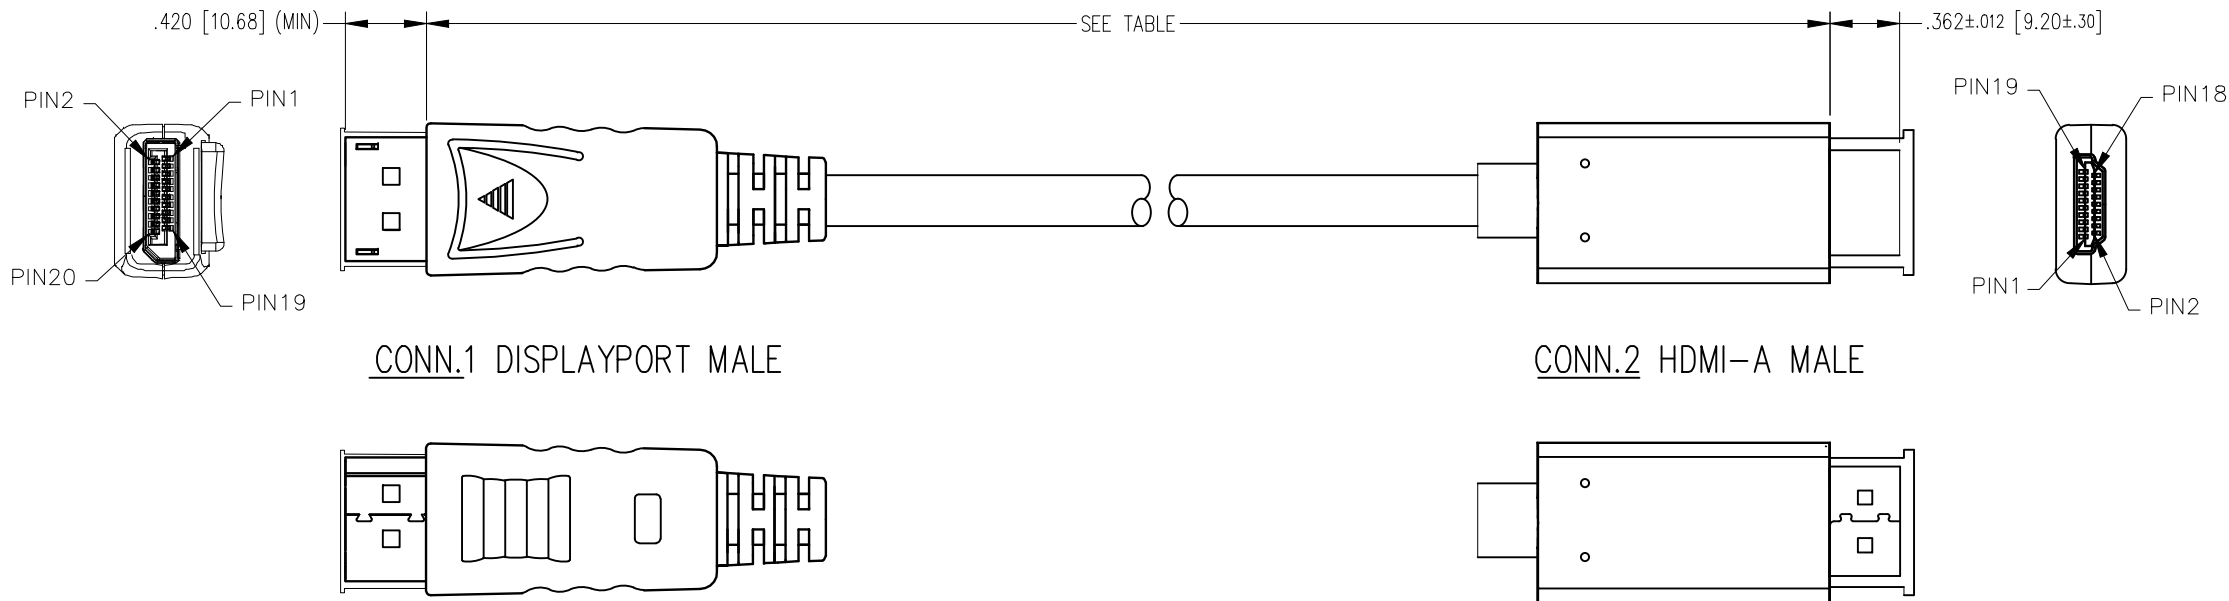


WIRING DIAGRAM

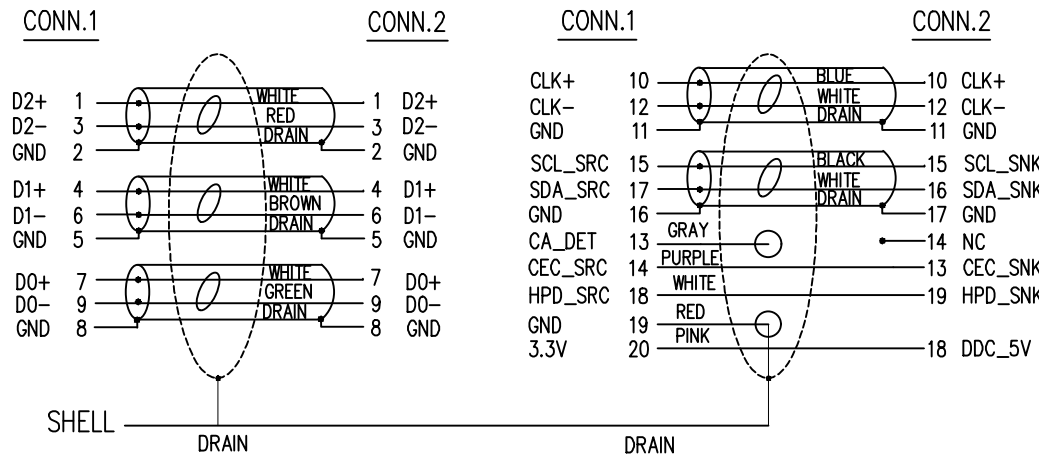


NOTES:

- SUPPORTS DISPLAYPORT 1.2a INPUT AND HDMI 1.4b OUTPUT.
- CONNECTOR COMPONENTS:
TRANSPARENT DUST COVER
INSIDE MOLDING: PE
STRAIN RELIEF MOLDING: 45P PVC, BLACK
OUTSIDE MOLDING:
DISPLAYPORT: ABS, BLACK
HDMI-A: 45P PVC, BLACK
SHELL PLATING: GOLD FLASH
CONTACT: GOLD PLATING
DISPLAYPORT CABLE UL20276 (7/0.127TA*PR+EAM)
*5+7/0.127TA*5C+AEB 85% OD:.29 [7.3] BLACK
- ELECTRICAL TESTING:
100% OPEN & SHORT & CONTINUITY WIRE TEST
CONTACT RESISTANCE: 6 OHM(MAX)
INSULATION RESISTANCE: 10M OHM(MIN)
HI-POT TEST: DC 100V/10ms
- PACKAGING
ONE CABLE PER BAG



P/N	LENGTH
BC-DH003F	36±1.2 [915±30]
BC-DH006F	72±1.2 [1830±30]
BC-DH010F	120±1.6 [3050±40]

THIRD ANGLE PROJECTION



DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ±.005 [0.13]
ANGLES ARE ± 1°

SHEET NO. 1 OF 1



206 Van Vorst Street
Jersey City, NJ 07302
+1 201 432 0463
<http://www.belfuse.com>

TITLE: DISPLAYPORT MALE TO HDMI-A MALE CABLE

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
BEL FUSE, INC. AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF BEL FUSE, INC.

DRN BY: JMM	DATE 05/16/19
APPD BY: ADB	DATE 05/29/19
DWG NO. CT999192	REV. A2

