


DATE	REV	ECN	APP'D. BY
06/12/19	A0	Released	AB
08/06/19	A1	11432	AB
03/20/23	A2	12124	GWL
04/29/25	A3	12548	GWL

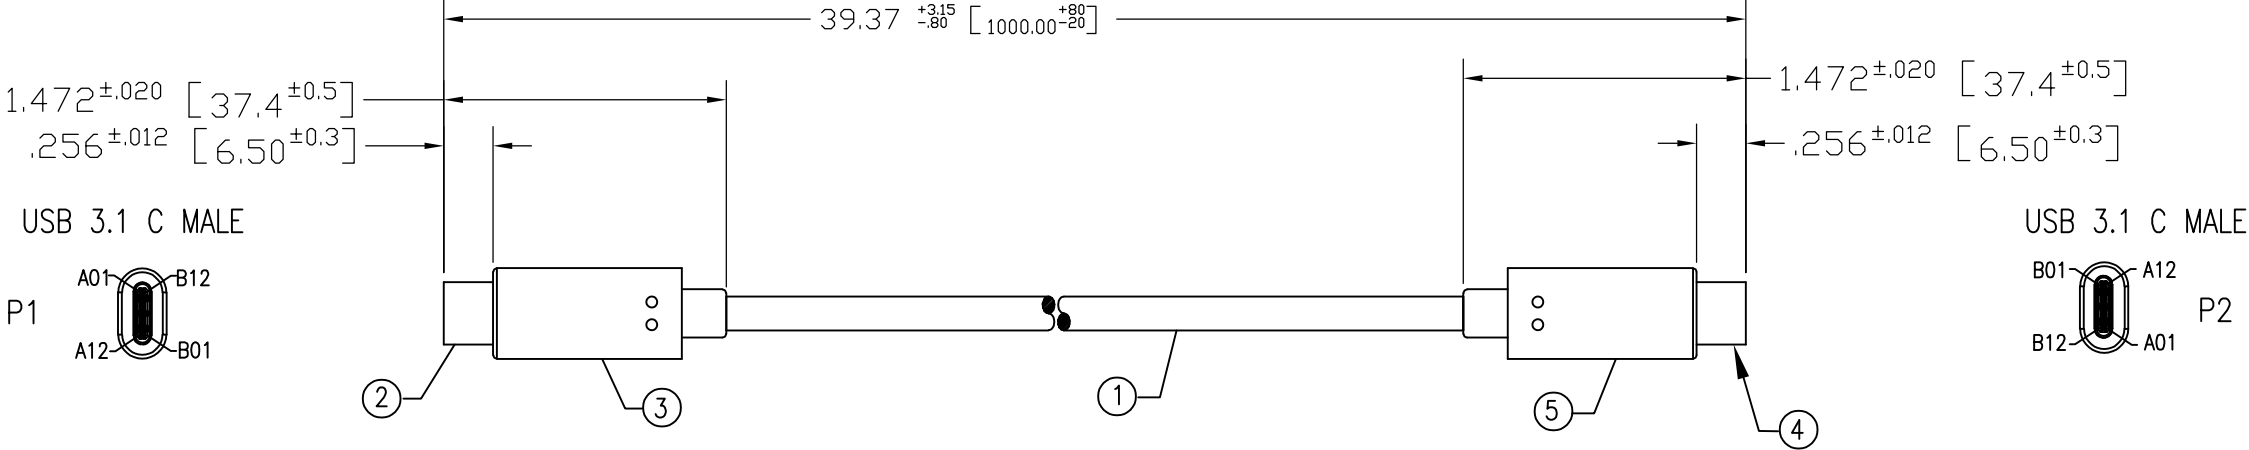

- Notes:
- Cable:
 - UL 2725 (1P+32AWG +D+AL+MYLAR)*4C
 - +1P 32AWG + 4C 32AWG +2C 24AWG +AL+D+B
 - OD: 4.5MM Color: Black.
 - Connector P1:
USB 3.1 C Type Connector Gold Flash on Contacts with PCB (IC), Black
Insulator Capacitor 10nF
 - Molded Boot: PVC, Color Black
 - Connector P2:
USB 3.1 C Type Connector Gold Flash on Contacts with PCB (IC), Black
Insulator Capacitor 10nF
 - Molded Boot: PVC, Color Black
 - Electrical Test:
 - 6.1. 100%Test(Open, short, miswire)
 - Current Rating: 5A
 - Packaging: Each cable assembly to be individually bagged

P/N Key:

SC-3CCKxxxM

Length

010 = 1 Meter


020 = 2 Meter

PIN ASSIGNMENT

P1	P2
A1+B1+A12+B12	A1+B1+A12+B12 ALL DRAIN
A4+B4+A9+B9	A4+B4+A9+B9 RED+BLACK #24*2
A2	B11 YELLOW
A3	B10 BLUE
A5	A5 BLUE
A6	A6 GREEN
A7	A7 WHITE
A8	B8 YELLOW
A10	B3 ORANGE
A11	B2 PURPLE
B2	A11 YELLOW
B3	A10 BLUE
B5	B5 ORANGE
B8	A8 PURPLE
B10	A3 ORANGE
B11	A2 PURPLE
SHIELD	SHIELD



THIRD ANGLE PROJECTION




DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE $\pm$.005 [0.13]
ANGLES ARE $\pm$ 1°

SHEET NO. 1 OF 1



stewart
CONNECTOR
a bel group

11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512

<http://www.stewartconnector.com>

TITLE:
Cable Assembly, USB 3.1, Type-C/M – Type-C/M, Black

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF STEWART CONNECTOR.

DRN BY:	GWL	DATE	05/30/19
APPD BY:	AB	DATE	06/12/19
DWG NO.	CT999196	REV.	A3