
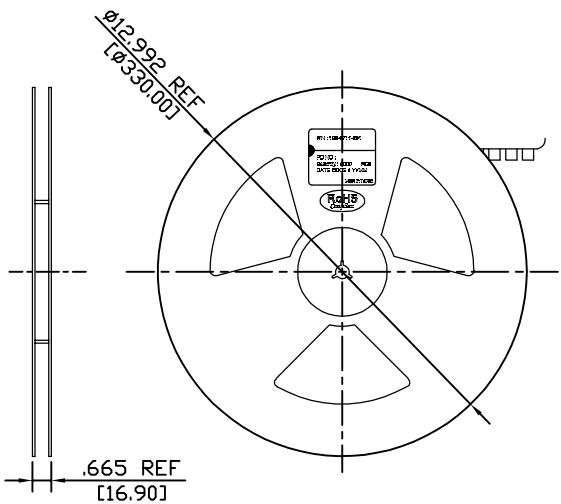
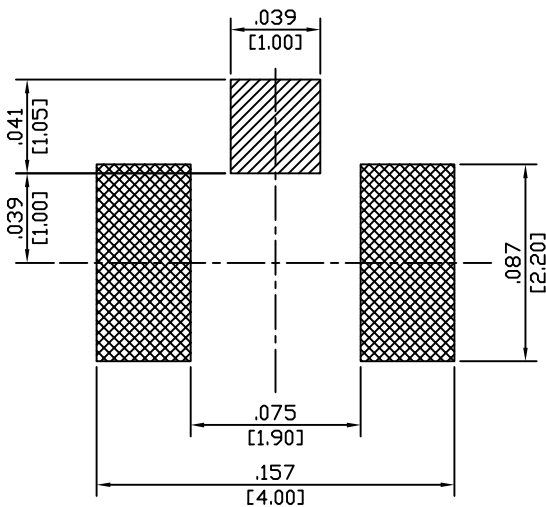
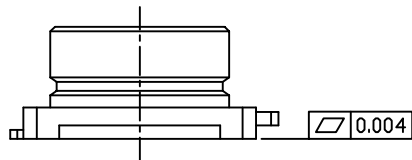
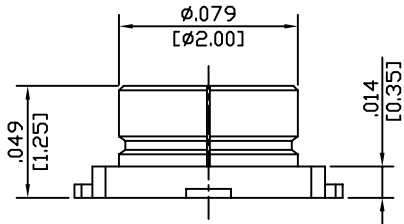
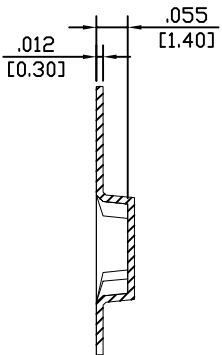
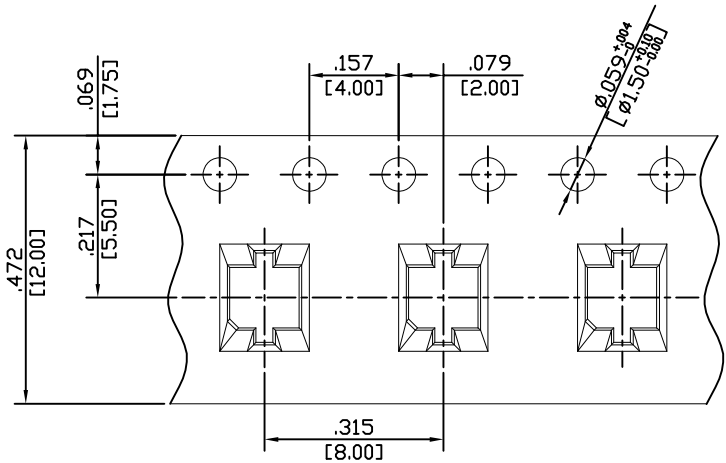



PART NUMBER	BODY	CENTER CONTACT	INSULATOR	PACKAGING
128-0711-231	PHOSPHOR BRONZE GOLD PLATED	BRASS GOLD PLATED	LCP	TAPE AND REEL 5000 PCS

REV	ECO	DATE
1	INITIAL RELEASE	12/09/2025

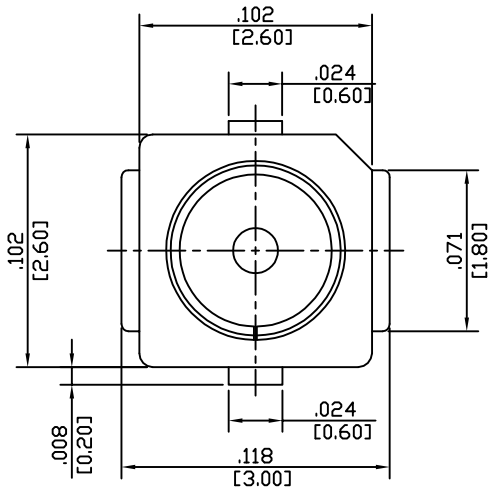

NOTES:

- ELECTRICAL SPECIFICATIONS
 - IMPEDANCE: 50 OHMS NOMINAL
 - FREQUENCY RANGE: 0-6 GHz
 - VSWR: 1.20 MAX (DC to 2.5 GHz), 1.3 MAX (2.5 GHz to 6 GHz)
 - INSERTION LOSS: 0.1 dB MAX (DC to 3.0 GHz), 0.15 MAX (3.0 GHz to 6.0 GHz)
 - WORKING VOLTAGE: 100 Vrms MAX AT SEA LEVEL
 - DIELECTRIC WITHSTANDING VOLTAGE: 300 Vrms MIN AT SEA LEVEL
 - CONTACT RESISTANCE: 100 MILLIOHMS MAX
 - INSULATION RESISTANCE: 1000 MEGOHMS MIN
- MECHANICAL SPECIFICATIONS
 - DURABILITY: 500 CYCLES MIN
- ENVIRONMENTAL SPECIFICATIONS
 - TEMPERATURE RANGE: -40°C to +90°C

RECOMMENDED PCB LAYOUT

		Model No.	128-0711-231	JOHNSON	
RoHS COMPLIANT EUD/2015/863 REACH SVHC XXX ±.01 .XXXX ±.01 ANGLES ±5°		Page Code	SEE ANGLE PRESENTATION	Title	
Drawn by: TOMMY REN Date: 12/09/2025		Drawing No. 128-0711-231		REV. 1	
Size B DO NOT SCALE DRAWING		Version: NONE		1 OF 1	